


PŘÍRUBY ZÁVITOVÉ




PN 16

| DN | Norma | připojovací rozměr | vnější průměr příruby | tl. listu příruby | délka příruby | průměr krku | pol. zaobl. | těsnící lišta | | průměr roztečné kružnice | šroubové otvory | | | hmotnost příruby (kg) |
|----|-------------------|--------------------|-----------------------|-------------------|---------------|-------------|-------------|---------------|-----|--------------------------|-----------------|----------------|--------|-----------------------|
| | | | | | | | | vnější prům. | tl. | | prům. | počet | rozměr | |
| 6 | DIN 2566 | 1/8" | 75 | 12 | 18 | 20 | - | 32 | 2 | 50 | 11 | 4 | M10 | 0,326 |
| 8 | DIN 2566 | 1/4" | 80 | 12 | 18 | 25 | - | 38 | 2 | 55 | 11 | 4 | M10 | 0,38 |
| | ČSN 131160.0 | 1/4" | 80 | 14 | 20 | 25 | 2 | 35 | 2 | 55 | 11 | 4 | M10 | 0,4 |
| | ČSN 131306.0 | 1/4" | 80 | 14 | 20 | 25 | 2 | 38 | 2 | 55 | 11 | 4 | M10 | 0,4 |
| 10 | EN 1092-1 / 13 B1 | 3/8" | 90 | 16 | 22 | 30 | 4 | 40 | 2 | 60 | 14 | 4 | M12 | 0,646 |
| | DIN 2566 | 3/8" | 90 | 14 | 20 | 30 | - | 40 | 2 | 60 | 14 | 4 | M12 | 0,544 |
| | ČSN 131160.0 | 3/8" | 90 | 14 | 20 | 30 | 2 | 40 | 2 | 60 | 14 | 4 | M12 | 0,55 |
| | ČSN 131306.0 | 3/8" | 90 | 14 | 20 | 30 | 2 | 40 | 2 | 60 | 14 | 4 | M12 | 0,55 |
| 15 | EN 1092-1 / 13 B1 | 1/2" | 95 | 16 | 22 | 35 | 4 | 45 | 2 | 65 | 14 | 4 | M12 | 0,722 |
| | DIN 2566 | 1/2" | 95 | 14 | 20 | 35 | - | 45 | 2 | 65 | 14 | 4 | M12 | 0,613 |
| | ČSN 131160.0 | 1/2" | 95 | 14 | 20 | 35 | 2 | 47 | 2 | 65 | 14 | 4 | M12 | 0,65 |
| | ČSN 131306.0 | 1/2" | 95 | 14 | 20 | 35 | 2 | 45 | 2 | 65 | 14 | 4 | M12 | 0,65 |
| 20 | EN 1092-1 / 13 B1 | 3/4" | 105 | 18 | 26 | 45 | 4 | 58 | 2 | 75 | 14 | 4 | M12 | 1,04 |
| | DIN 2566 | 3/4" | 105 | 16 | 24 | 45 | - | 58 | 2 | 75 | 14 | 4 | M12 | 0,91 |
| | ČSN 131160.0 | 3/4" | 105 | 16 | 24 | 43 | 2 | 58 | 2 | 75 | 14 | 4 | M12 | 0,95 |
| | ČSN 131306.0 | 3/4" | 105 | 16 | 24 | 43 | 2 | 58 | 2 | 75 | 14 | 4 | M12 | 0,95 |
| 25 | EN 1092-1 / 13 B1 | 1" | 115 | 18 | 28 | 52 | 4 | 68 | 2 | 85 | 14 | 4 | M12 | 1,25 |
| | DIN 2566 | 1" | 115 | 16 | 24 | 52 | - | 68 | 2 | 85 | 14 | 4 | M12 | 1,1 |
| | ČSN 131160.0 | 1" | 115 | 16 | 24 | 52 | 3 | 68 | 2 | 85 | 14 | 4 | M12 | 1,1 |
| | ČSN 131306.0 | 1" | 115 | 16 | 24 | 52 | 3 | 68 | 2 | 85 | 14 | 4 | M12 | 1,1 |
| 32 | EN 1092-1 / 13 B1 | 5/4" | 140 | 18 | 30 | 60 | 6 | 78 | 2 | 100 | 18 | 4 | M16 | 1,81 |
| | DIN 2566 | 5/4" | 140 | 16 | 26 | 60 | - | 78 | 2 | 100 | 18 | 4 | M16 | 1,6 |
| | ČSN 131160.0 | 5/4" | 140 | 16 | 26 | 60 | 3 | 78 | 2 | 100 | 18 | 4 | M16 | 1,7 |
| | ČSN 131306.0 | 5/4" | 140 | 16 | 26 | 60 | 3 | 78 | 2 | 100 | 18 | 4 | M16 | 1,6 |
| 40 | EN 1092-1 / 13 B1 | 6/4" | 150 | 18 | 32 | 70 | 6 | 88 | 3 | 110 | 18 | 4 | M16 | 2,06 |
| | DIN 2566 | 6/4" | 150 | 16 | 26 | 70 | - | 88 | 3 | 110 | 18 | 4 | M16 | 1,78 |
| | ČSN 131160.0 | 6/4" | 150 | 18 | 28 | 68 | 5 | 88 | 3 | 110 | 18 | 4 | M16 | 2,1 |
| | ČSN 131306.0 | 6/4" | 150 | 18 | 28 | 68 | 5 | 88 | 3 | 110 | 18 | 4 | M16 | 2 |
| 50 | EN 1092-1 / 13 B1 | 2" | 165 | 18 | 28 | 84 | 6 | 102 | 3 | 125 | 18 | 4 | M16 | 2,39 |
| | DIN 2566 | 2" | 165 | 18 | 28 | 85 | - | 102 | 3 | 125 | 18 | 4 | M16 | 2,43 |
| | ČSN 131160.0 | 2" | 165 | 18 | 30 | 82 | 5 | 102 | 3 | 125 | 18 | 4 | M16 | 2,8 |
| | ČSN 131306.0 | 2" | 165 | 18 | 30 | 82 | 5 | 102 | 3 | 125 | 18 | 4 | M16 | 2,7 |
| 65 | EN 1092-1 / 13 B1 | 2 1/2" | 185 | 18 | 32 | 104 | 6 | 122 | 3 | 145 | 18 | 8 _d | M16 | 2,97 _d |
| | DIN 2566 | 2 1/2" | 185 | 18 | 32 | 105 | - | 122 | 3 | 145 | 18 | 4 | M16 | 3,18 |
| | ČSN 131160.0 | 2 1/2" | 185 | 18 | 32 | 104 | 5 | 122 | 3 | 145 | 18 | 4 | M16 | 3,7 |
| | ČSN 131306.0 | 2 1/2" | 185 | 18 | 32 | 104 | 5 | 122 | 3 | 145 | 18 | 4 | M16 | 3,5 |
| 80 | EN 1092-1 / 13 B1 | 3" | 200 | 20 | 34 | 118 | 6 | 138 | 3 | 160 | 18 | 8 | M16 | 3,78 |
| | DIN 2566 | 3" | 200 | 20 | 34 | 118 | - | 138 | 3 | 160 | 18 | 8 | M16 | 4,12 |
| | ČSN 131160.0 | 3" | 200 | 20 | 35 | 116 | 5 | 133 | 3 | 160 | 18 | 8 | M16 | 4,5 |
| | ČSN 131306.0 | 3" | 200 | 20 | 35 | 116 | 5 | 138 | 3 | 160 | 18 | 8 | M16 | 4,3 |

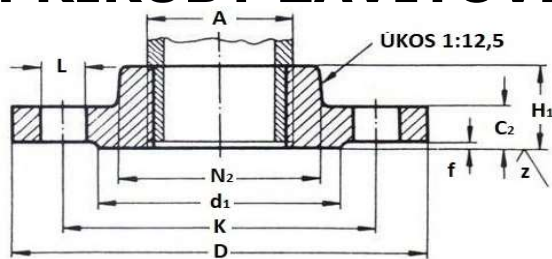

PŘÍRUBY ZÁVITOVÉ

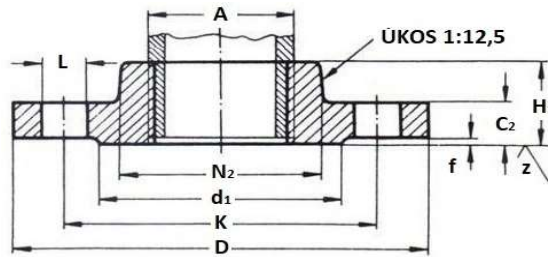

PN 16

| DN | Norma | připojovací rozměr | | vnější průměr příruby | tl. listu příruby | délka příruby | průměr krku | pol. zaobl. | těsnící lišta | | šroubové otvory | | | hmotnost příruby (kg) |
|-----|-------------------|--------------------|-----|-----------------------|-------------------|---------------|-------------|-------------|---------------|-----|-----------------|---|--------------|-----------------------|
| | | A | D | | | | | | C2 | H1 | N2 | R | vnější prům. | |
| 100 | EN 1092-1 / 13 B1 | 4" | 220 | 20 | 40 | 140 | 8 | 158 | 3 | 180 | 18 | 8 | M16 | 4,38 |
| | DIN 2566 | 4" | 220 | 20 | 38 | 140 | - | 158 | 3 | 180 | 18 | 8 | M16 | 4,47 |
| 125 | EN 1092-1 / 13 B1 | 5" | 250 | 22 | 44 | 168 | 8 | 188 | 3 | 210 | 18 | 8 | M16 | 6,07 |
| 150 | EN 1092-1 / 13 B1 | 6" | 285 | 22 | 44 | 195 | 10 | 212 | 3 | 240 | 22 | 8 | M20 | 7,24 |

