


Přechody trubkové

DN 20 až DN 350; PN 40 až PN 100

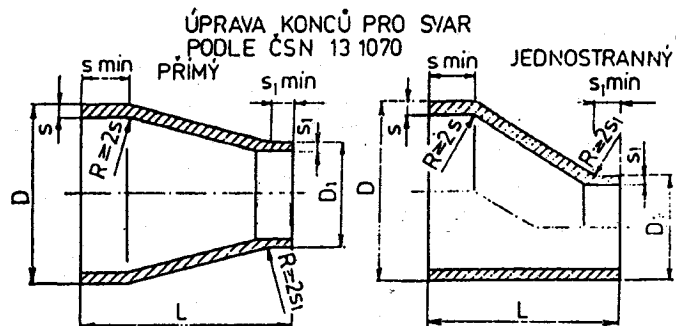

DN/DN ₁		D	D ₁	L		Jmenovitý tlak Jt			
DN	DN ₁					40	64	100	
20	15	28	22	40	s	2,5	-	-	
					s ₁	2,5	-	-	
					m	0,1	-	-	
25	20	32	28	50	s	2,5	-	-	
					s ₁	2,0	-	-	
					m	0,1	-	-	
	15	22	22	22	50	s	2,5	3,0	3,0
						s ₁	2,0	2,5	2,5
						m	0,1	0,1	0,1
32	25	38	32	50	s	2,5	-	-	
					s ₁	2,5	-	-	
					m	0,1	-	-	
	20	28	28	28	50	s	2,5	-	-
						s ₁	2,5	-	-
						m	0,1	-	-
15	22	22	22	50	s	2,5	-	-	
					s ₁	2,5	-	-	
					m	0,1	-	-	
40	32	44,5	38	65	s	2,5	-	-	
					s ₁	2,5	-	-	
					m	0,2	-	-	
	25	28	28	28	65	s	2,5	3,0	3,0
						s ₁	2,5	3,0	3,0
						m	0,2	0,3	0,3
20	32	32	32	65	s	2,5	-	-	
					s ₁	2,5	-	-	
					m	0,2	-	-	
50	40	57	44,5	75	s	3,0	3,5	4,0	
					s ₁	2,5	3,0	3,0	
					m	0,4	0,4	0,5	
	32	38	38	38	75	s	3,0	-	-
						s ₁	2,5	-	-
						m	0,4	-	-
25	32	32	32	75	s	3,0	3,5	4,0	
					s ₁	2,5	3,0	3,0	
					m	0,4	0,4	0,5	
65	50	76	57	90	s	3,0	3,5	5,0	
					s ₁	3,0	3,5	4,0	
					m	0,6	0,7	1,0	
	40	44,5	44,5	44,5	90	s	3,0	3,5	5,0
						s ₁	3,0	3,0	3,0
						m	0,6	0,7	1,0
80	65	89	76	90	s	3,5	4,0	5,5	
					s ₁	3,0	3,5	5,0	
					m	0,8	0,9	1,2	
50	57	57	57	90	s	3,5	4,0	5,5	
					s ₁	3,0	3,5	4,0	
					m	0,8	0,9	1,2	

DN/DN ₁		D	D ₁	L		Jmenovitý tlak Jt			
DN	DN ₁					40	64	100	
100	80	108	89	100	s	4,0	4,5	7,0	
					s ₁	3,5	4,0	5,5	
					m	1,2	1,4	2,1	
	65	76	76	76	100	s	4,0	4,5	7,0
						s ₁	3,0	3,5	5,0
						m	1,2	1,4	2,1
125	100	133	108	130	s	4,0	5,5	8,0	
					s ₁	4,0	4,5	7,0	
					m	1,9	2,6	3,7	
	80	89	89	89	130	s	4,0	5,5	8,0
						s ₁	3,5	4,0	5,5
						m	1,9	2,6	3,7
150	125	159	133	140	s	4,5	7,0	10,0	
					s ₁	4,0	5,5	8,0	
					m	2,7	4,2	5,9	
	100	108	108	108	140	s	4,5	7,0	10,0
						s ₁	4,0	5,5	7,0
						m	2,7	4,2	5,9
200	150	219	159	230	s	6,0	9,0	14,0	
					s ₁	4,5	7,0	10,0	
					m	7,9	11,6	17,8	
	125	133	133	133	230	s	6,0	9,0	14,0
						s ₁	4,0	7,0	8,0
						m	7,9	11,6	17,8
250	200	273	219	290	s	6,5	10,0	16,0	
					s ₁	8,0	9,0	14,0	
					m	13,2	20,1	31,4	
	100	159	159	159	290	s	6,5	10,0	16,0
						s ₁	8,0	7,0	10,0
						m	13,2	20,1	31,4
300	250	324	273	290	s	7,5	12,0	20,0	
					s ₁	6,5	10,0	16,0	
					m	18,1	28,5	46,5	
	200	219	219	219	290	s	7,5	12,0	20,0
						s ₁	6,5	10,0	14,0
						m	18,1	28,5	46,5
350	300	377	324	330	s	9,0	14,0	22,0	
					s ₁	7,5	12,0	20,0	
					m	28,6	43,8	67,5	
	250	273	273	273	330	s	9,0	14,0	22,0
						s ₁	7,5	10,0	16,0
						m	28,6	43,8	67,5

Norma platná od 1. 5. 1977

Tiskařská 690/6a, 108 00 Praha 10
 Tel.: +420 272 700 860
 Fax: +420 272 702 153
 GSM brána: 602 182 090, 606 600 081
 E-mail: trival@trival.cz

NON-STOP 24 HOD. INFORMAČNÍ
 A DODÁVKOVÁ SLUŽBA: 602 217 549
 602 651 061
 602 219 979

www.trival.cz